

COMPASS with FORBID™ SRT and CHROMACOOL™ is manufactured to meet the following typical properties:

#### Specifications:

Width .....	54"
Roll Size .....	30 yds
Thickness .....	1.02 mm
Nominal Weight .....	33 oz. per linear yd
Contents .....	100% PVC
Backing .....	Q1 Polyester
Cold Crack .....	-10°F
UV Stabilized Pigments .....	650 hours minimum
Mildew Resistant (ASTM G-21) .....	Pass
Anti-Bacterial/Anti-Microbial (AATCC 147).....	Pass
Abrasion Resistance <sup>†</sup> .....	Wyzenbeek: (100K cycles #10 cotton duck)

#### Suggested Applications:

Marine, Outdoor, Golf Cart Seating



This fabric meets or exceeds these ACT performance guidelines. Certification Marks owned by ACT.

<sup>†</sup> Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

#### FORBID™ SRT Clean and Care Guide

 FORBID™ provides stain resistance while preserving fabric integrity and softness.

**Method 1:** For most common stains, use soap & water.


**Method 2:** If Method One doesn't work, use the following; FANTASTIK, 409 or MR.CLEAN.

**Method 3:** For tougher stains use 70% isopropyl alcohol.

	STAINING AGENT					
	DIRT	PEN	SHARPIE	PAINT	KETCHUP & MUSTARD	BLUE JEAN
METHOD 1	X	X				X
METHOD 2	X	X			X	X
METHOD 3		X	X	X	X	X

#### ChromaCool™ Technology

 blocks and reflects UV rays and reduces heat absorption, keeping fabric cool.

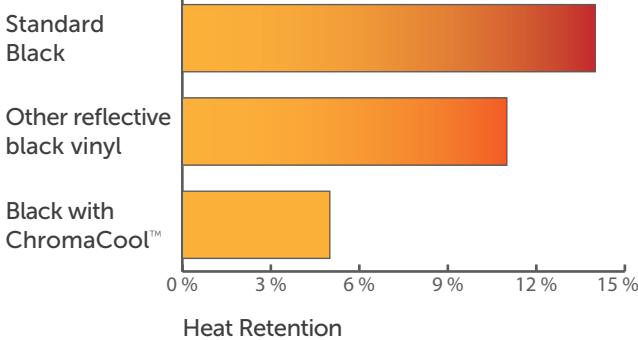

The Enduratex™ care guide addresses the performance of FORBID™ SRT products as indicated in product testing, conducted under laboratory conditions. Results may vary. The information contained in this guide is not a guarantee and does not relieve the user of the responsibility of proper and safe use of recommended cleaning agents. The use of certain agents has been found to be harmful to the surface appearance and lifespan of vinyl. Please familiarize yourself with those products for best results. Enduratex™ topcoat, FORBID™ SRT, is resistant to most common stains, however existing dyes and pigments in some agents have been seen to create a permanent stain if not properly treated in a timely manner. Enduratex™ maintains the highest vinyl production standards. Anomalies may occur during finishing if the vinyl comes into contact with incompatible forms.

ENDURATEX™, FORBID™ and CHROMACOOL™ are trademarks of CGPC America Corp. and may not be used without written permission of CGPC America Corp.

**CCFA** CHEMICAL FABRICS & FILM ASSOCIATION INC.



**IIDA**  
INTERNATIONAL DESIGN ASSOCIATION  
INDUSTRY MEMBER

AMERICAN SOCIETY OF  
INTERIOR DESIGNERS  
AS  
INDUSTRY PARTNER



**ENDURATEX™**  
We cover the world.

enduratex.com | cs@enduratex.com  
800.243.2472 | 951.332.4100 | fax: 951.332.4076  
Warehouse Locations: California, Tennessee