

NIAGARA with FORBID™ SRT and CHROMACOOOL™ is manufactured to meet the following typical properties:

Specifications:

Width 54"
 Roll Size 30 yds
 Thickness 1.02 mm
 Nominal Weight 33 oz. per linear yd
 Contents 100% PVC
 Backing Q1 Polyester
 Cold Crack -10°F
 UV Stabilized Pigments 650 hours minimum
 Mildew Resistant (ASTM G-21) Pass
 Anti-Bacterial/Anti-Microbial (AATCC 147) Pass
 Abrasion Resistance† Wyzenbeek:
 (100K cycles #10 cotton duck)

Suggested Applications:

Marine, Outdoor, Golf Cart Seating



This fabric meets or exceeds these ACT performance guidelines. Certification Marks owned by ACT.

† Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Meets Flammability Requirements*:

IMO FTPC Part 8
 Motor Vehicle Safety Standard 302
 California Technical Bulletin 117-2013 Section 1**
 BIFMA, Class A
 UFAC, Class 1
 NFPA 260, Class 1

*This term and any corresponding data refer to typical performance in the specific test indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** This product, when tested with suitable component materials, may comply with California Technical Bulletin 117-2013, Section 1.

Other Attributes:



FORBID™ SRT Clean and Care Guide

FORBID™ provides stain resistance while preserving fabric integrity and softness.

Method 1: For most common stains, use soap & water.


Method 2: If Method One doesn't work, use the following; FANTASTIK, 409 or MR.CLEAN.

Method 3: For tougher stains use 70% isopropyl alcohol.

	STAINING AGENT					
	DIRT	PEN	SHARPIE	PAINT	KETCHUP & MUSTARD	BLUE JEAN
METHOD 1	X	X				X
METHOD 2	X	X			X	X
METHOD 3		X	X	X	X	X

ChromaCool™ Technology

CHROMACOOOL™ blocks and reflects UV rays and reduces heat absorption, keeping fabric cool.

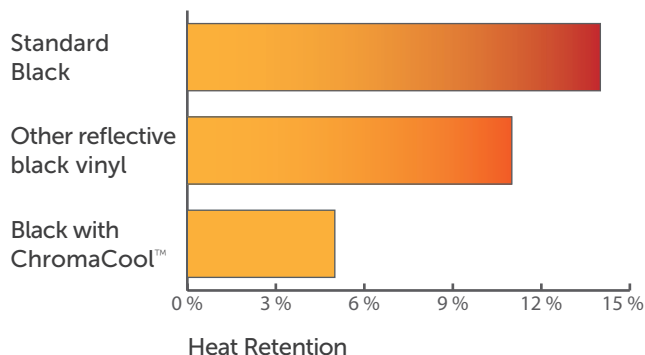

The Enduralex™ care guide addresses the performance of FORBID™ SRT products as indicated in product testing, conducted under laboratory conditions. Results may vary. The information contained in this guide is not a guarantee and does not relieve the user of the responsibility of proper and safe use of recommended cleaning agents. The use of certain agents has been found to be harmful to the surface appearance and lifespan of vinyl. Please familiarize yourself with those products for best results. Enduralex™ topcoat, FORBID™ SRT, is resistant to most common stains, however existing dyes and pigments in some agents have been seen to create a permanent stain if not properly treated in a timely manner. Enduralex™ maintains the highest vinyl production standards. Anomalies may occur during finishing if the vinyl comes into contact with incompatible forms.

ENDURATEX™, FORBID™ and CHROMACOOOL™ are trademarks of CGPC America Corp. and may not be used without written permission of CGPC America Corp.



ENDURATEX™
 We cover the world.

enduralex.com | cs@enduralex.com
 800.243.2472 | 951.332.4100 | fax: 951.332.4076
 Warehouse Locations: California, Tennessee